

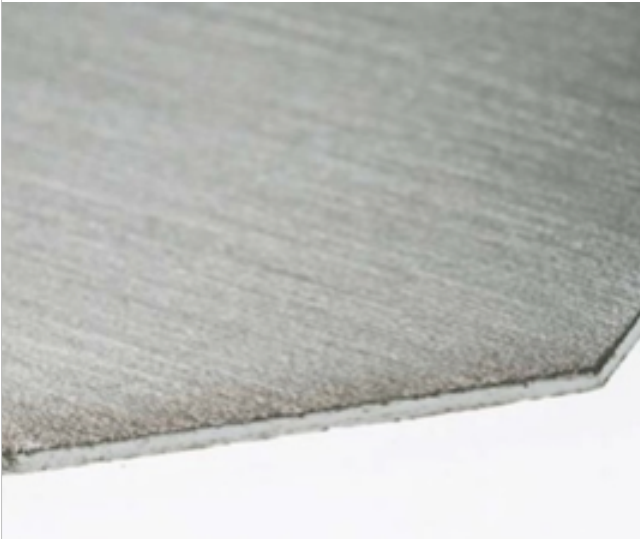


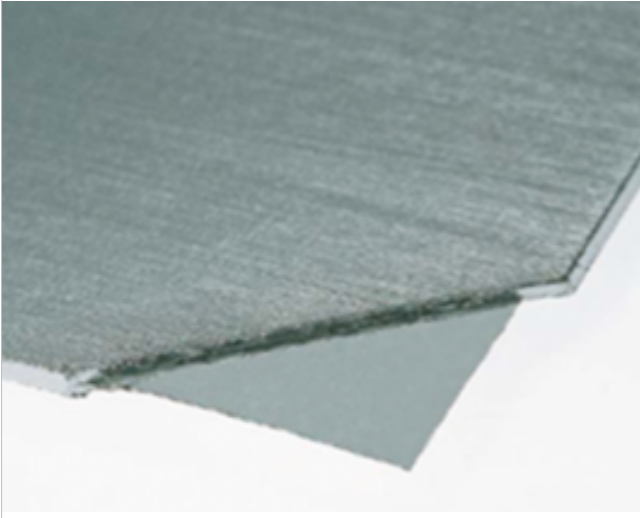

GRAPHITE	
MATERIALS	CHARACTERISTICS
<p>Expanded graphite sheets not reinforced</p> 	<p>The purity of graphite used is 98%</p> <ul style="list-style-type: none">-temperature max. 450°C-pressure max. 40 bar
<p>Reinforced graphite sheets, inserted with stainless steel AISI 316 thk. 0,05 mm</p> 	<p>The purity of graphite used is 98% with stainless steel insert AISI 316</p> <ul style="list-style-type: none">-temperature max. 450°C-pressure max. 40 bar

Tanged reinforced graphite sheets with stainless steel AISI 316 thk. 0,1 mm

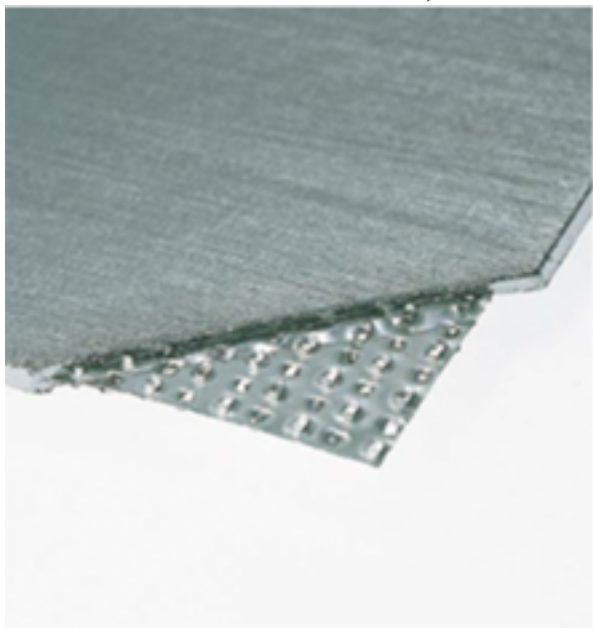

The purity of graphite used is 98% with tanged stainless steel insert AISI 316
-temperature max. 450°C
-pressure max. 120 bar